Shenzhen Jylaimi Electronic Technology Co., Ltd.

Web: www.Jylaimi.com | Phone: +86 135 1040 4500| Email: sales@Jylaimi.com

Indoor & Outdoor LED Cube Display

4/5/6 Faces is available

	Model	Screen Size	Resolution	Faces	EXW Unit Price
Indoor LED Cube	P2	320×320mm/13''×13''	160×160 Pixel	4 Faces	/
				5 Faces	/
		640×640mm/25''×25''	320×320 Pixel	4 Faces	/
				5 Faces	/
	P2.5	320×320mm/13''×13''	128×128 Pixel	4 Faces	/
				5 Faces	/
		480×480mm/19''×19''	192×192 Pixel	4 Faces	/
				5 Faces	/
		640×640mm/25''×25''	256×256 Pixel	4 Faces	/
				5 Faces	/
	P2.6	500×500mm/20''×20''	192×192 Pixel	4 Faces	/
				5 Faces	/
	P2.9	500×500mm/20''×20''	168×168 Pixel	4 Faces	/
				5 Faces	/
	P3	576×576mm/23''×23''	192×192 Pixel	4 Faces	/
				5 Faces	/

	Model	Screen Size	Resolution	Faces	EXW Unit Price
Outdoor LED Cube	P2.5	320×320mm/13''×13''	128×128 Pixel	4 Faces	/
				5 Faces	/
		480×480mm/19''×19''	192×192 Pixel	4 Faces	/
				5 Faces	/
		640×640mm/25''×25''	256×256 Pixel	4 Faces	/
				5 Faces	/
	P2.6	500×500mm/20''×20''	192×192 Pixel	4 Faces	/
				5 Faces	/
	P2.9	500×500mm/20''×20''	168×168 Pixel	4 Faces	/
				5 Faces	/
	P3	384×384mm/15''×15''	128×128 Pixel	4 Faces	/
				5 Faces	/
		576×576mm/23''×23''	192×192 Pixel	4 Faces	/
				5 Faces	/

Model	Indoor									
Pixel Pitch	2mm		2.5mm		2.6mm		2.9mm		3mm	
Pixel Density	250,000		160,000		147,456		112,896		111,111	
LED Type	SMD1515		SMD2121		SMD1515		SMD2121		SMD2121	
Module Size	320×160mm		320×160mm		250×250mm		250×250mm		192×192mm	
Module Resolution	160×80 Pixel		128×64 Pixel		96×96 Pixel		84×84 Pixel		64×64 Pixel	
Driving Method	1/32		1/32		1/32		1/28		1/32	
Screen Size	640×640mm/25'' × 25''		640×640mm/25'' × 25''		500×500mm/20'' × 20''		500×500mm/20'' × 20''		576×576mm/23'' × 23''	
Screen Resolution	320×320 Pixel		256×256 Pixel		192×192 Pixel		168×168 Pixel		192×192 Pixel	
Faces	4 Faces	5 Faces	4 Faces	5 Faces	4 Faces	5 Faces	4 Faces	5 Faces	4 Faces	5 Faces
Ingress Protection	IP43		IP43		IP43		IP43		IP43	
Voltage	AC100-240V		AC100-240V		AC100-240V		AC100-240V		AC100-240V	
Max.Power	700W		700W		680W		680W		600W	
Avg.Power	325W		325W		300W		300W		300W	
Brightness	800nits		800nits		800nits		800nits		1000nits	
Lifetime	100,000 Hours		100,000 Hours		100,000 Hours		100,000 Hours		100,000 Hours	
Refresh Rate	3840hz		1920/3840hz		1920/3840hz		1920/3840hz		1920/3840hz	

Control Mode	LAN/WiFi/USB Control
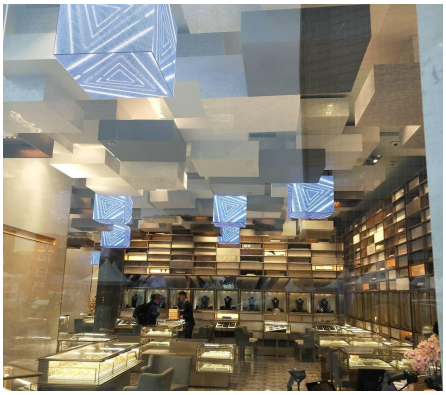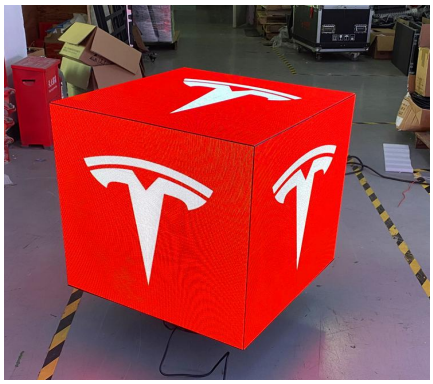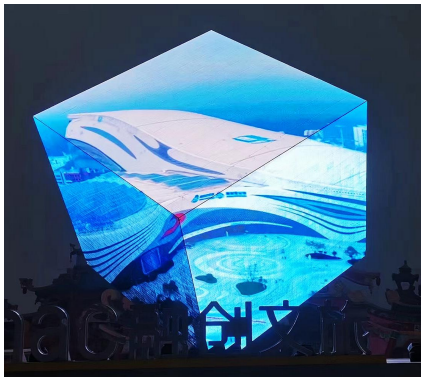
Model	Outdoor									
Pixel Pitch	2.5mm		2.6mm		2.9mm		3mm		3.91mm	
Pixel Density	160,000		147,456		112,896		111,111		65,536	
LED Type	SMD1415		SMD1415		SMD1415		SMD1415		SMD1921	
Module Size	320×160mm		250×250mm		250×250mm		192×192mm		250×250mm	
Module Resolution	128×64 Pixel		96×96 Pixel		84×84 Pixel		64×64 Pixel		64×64 Pixel	
Driving Method	1/16		1/21		1/21		1/16		1/16	
Screen Size	640×640mm/25'' × 25''		500×500mm/20'' × 20''		500×500mm/20'' × 20''		576×576mm/23'' × 23''		500×500mm/20'' × 20''	
Screen Resolution	256×256 Pixel		192×192 Pixel		168×168 Pixel		192×192 Pixel		128×128 Pixel	
Faces	4 Faces	5 Faces	4 Faces	5 Faces	4 Faces	5 Faces	4 Faces	5 Faces	4 Faces	5 Faces
Ingress Protection	IP65		IP65		IP65		IP65		IP65	
Voltage	AC100-240V		AC100-240V		AC100-240V		AC100-240V		AC100-240V	
Max.Power	800W		800W		800W		800W		800W	
Avg.Power	300W		300W		300W		300W		300W	
Brightness	5000nits		5000nits		5000nits		5000nits		5000nits	
Lifetime	100,000 Hours		100,000 Hours		100,000 Hours		100,000 Hours		100,000 Hours	
Refresh Rate	1920/3840hz		1920/3840hz		1920/3840hz		1920/3840hz		1920/3840hz	
Control Mode	LAN/WiFi/USB Control